

产品介绍

INTRODUCTION









CW4L3-+A-R

CW4L3-*A-S(003)

CW4L4-+A-R

CW4L5-∗A-R

- 单相交流电源滤波器 Single Phase AC Filters
- Single Phase AC Filters
- 含共模和差模线圈 With common mode and differential mode coil
- 端子排连接安全快捷 Terminal block connected is safe and quick
- 超高性能滤波器 Ultra high performance filter
- 多种极数可供选择 Multiple pole to choose from
- 多种安装方式可供选择 Multiple installation methods to choose from

产品特点

FEATURE

■ CW4L3-+A-S(003) 螺丝固定三极滤波器 Three pole filter by screw fixed

Timee pole litter by serew lixes

CW4L3-∗A-R

侧面导轨固定三极滤波器

Three pole filter by side guide rail fixed

CW4L4-∗A-R

螺丝固定四极滤波器 Four pole filter by screw fixed

CW4L5-∗A-R

螺丝固定五极滤波器 Five pole filter by screw fixed

应用范围

APPLICATION

- 电子电气设备 Electrical and Electronic Equipment
- 消费电子 Consumer Electronic Production
- Medical Equipment

医疗设备

- 数据通讯设备 Data Communication
- 办公自动化设备 Office Automation Equipment
- 其他电源产品等 Other Power Production...

技术参数

TECHNICAL DATA

■ 额定电压 /Rated Voltage: 115/250V AC

■ 额定电流 / Rated Current: 1-30A

■ 工作频率 / Working Frequency: 50/60Hz

■ 气候类型 / Climatic Category: 25/85/21


■ 测试电压/Working Frequency: 1500V DC(Line to Line) 2000V AC(Line to Ground)

产品列表

LIST


CW4L3-*A-R 3/6/10/20/30 <0.5 B16				
CW4L3-*A-R 3/6/10/20/30 \0.5 B16	A38	导轨 Rail	573	RoHS C€
CW4L3-*A-S(003) 3/6/10/20/30 <0.5 B16	A31	螺丝 Screw	570	RoHS (€
CW4L4-*A-R 3/6/10/20/30 <0.65 B20	A36	螺丝 Screw	863	RoHS C€
CW4L5-+A-R 3/6/10/20/30 <0.65 B22	A40	螺丝 Screw	1300	RoHS C€ ⊚©

外形尺寸(mm) **DIMENSION**

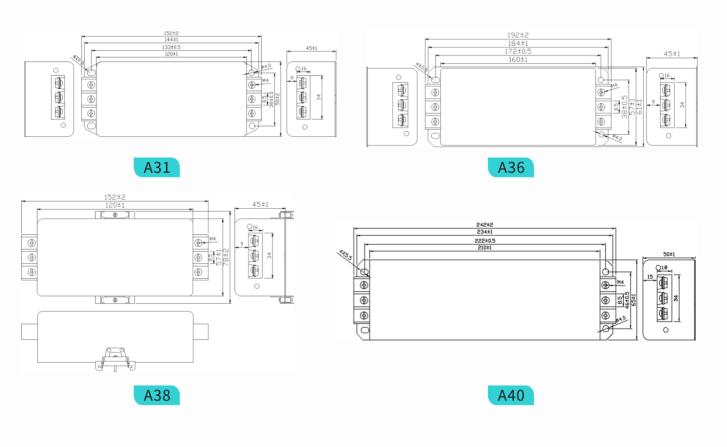

电路图 -SCHEM

SCHEMATICS

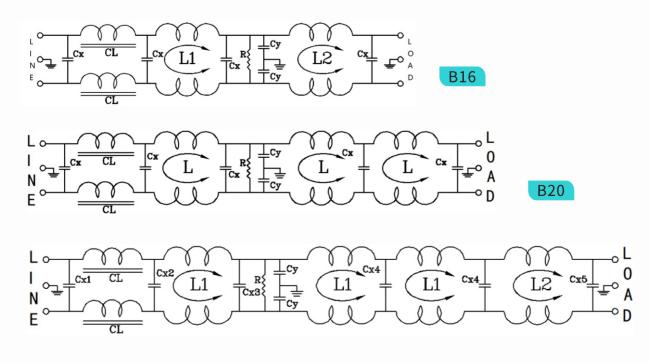

B22